



Produktblatt

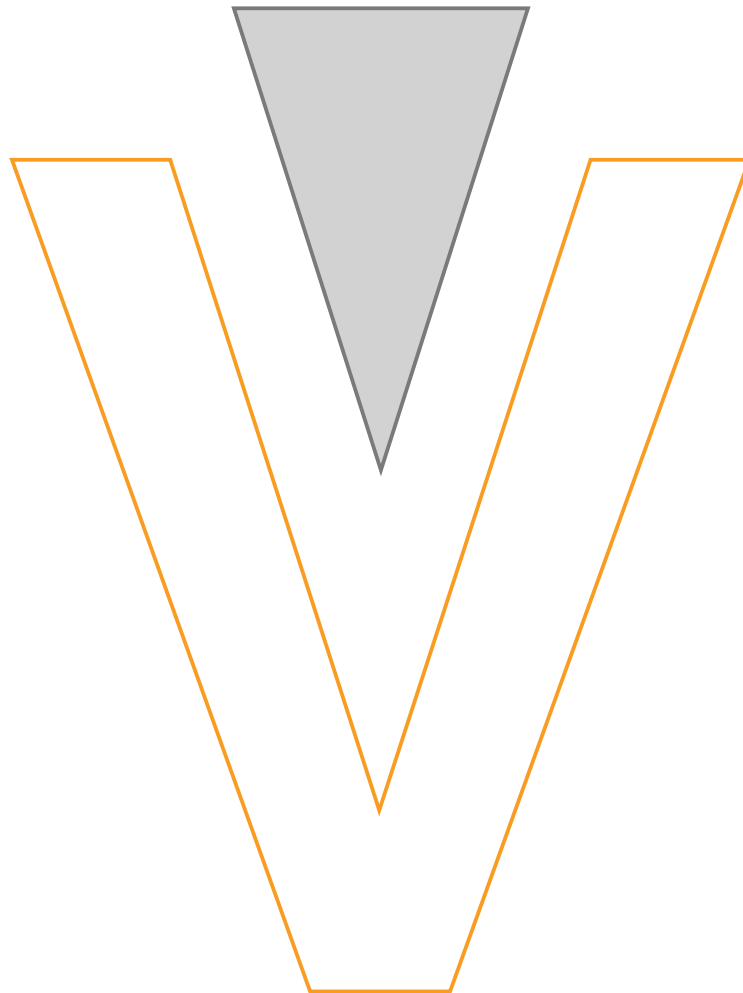

## Y-Stück

Abzweige eingeschweißt

aus Edelstahl



D	s	l	kg	Art.-Nr.
21,3	2,0	25	0,050	YP-021-020
26,9	2,0	29	0,130	YP-026-020
33,7	2,0	38	0,140	YP-033-020
42,4	2,0	48	0,300	YP-042-020
48,3	2,0	57	0,320	YP-048-020
48,3	2,6	57	0,400	YP-048-026
60,3	2,0	64	0,400	YP-060-020
60,3	2,6	64	0,700	YP-060-026
76,1	2,0	76	0,640	YP-076-020
76,1	2,6	76	0,800	YP-076-026
88,9	2,0	86	0,850	YP-088-020
88,9	2,6	86	1,100	YP-088-026
114,3	2,0	105	1,500	YP-114-020
114,3	2,6	105	1,720	YP-114-026
114,3	3,0	105	2,120	YP-114-030
139,7	2,0	124	1,970	YP-139-020
139,7	2,6	124	2,420	YP-139-026
139,7	3,0	124	3,000	YP-139-030
168,3	2,0	143	2,700	YP-168-020
168,3	2,6	143	4,500	YP-168-026
168,3	3,0	143	5,000	YP-168-030
219,1	2,0	178	4,400	YP-219-020
219,1	3,0	178	7,000	YP-219-030
273,0	3,0	216	9,200	YP-273-030
323,9	3,0	254	13,820	YP-323-030
355,6	3,0	279	17,000	YP-355-030
406,4	3,0	305	23,000	YP-406-030

Verfügbare Werkstoffe: 1.4571

Y-/ X-Stücke > Y-Stück



### Y-Stück

mit Anschweißenden

#### Ausführung

aus geschweißtem Rohr EN 10217-7 gefertigt

lasergeschnitten

unter Schutzgas geschweißt

im Tauchbad gebeizt

Abmessungsbereich DN 10 bis DN 600

optionale Wandstärken bis 5,0 mm

Werkstoffe 1.4307/304L - 1.4571 - 1.4404/316L

Attest Vormaterial gem. EN 10204/3.1

