



Product Sheet

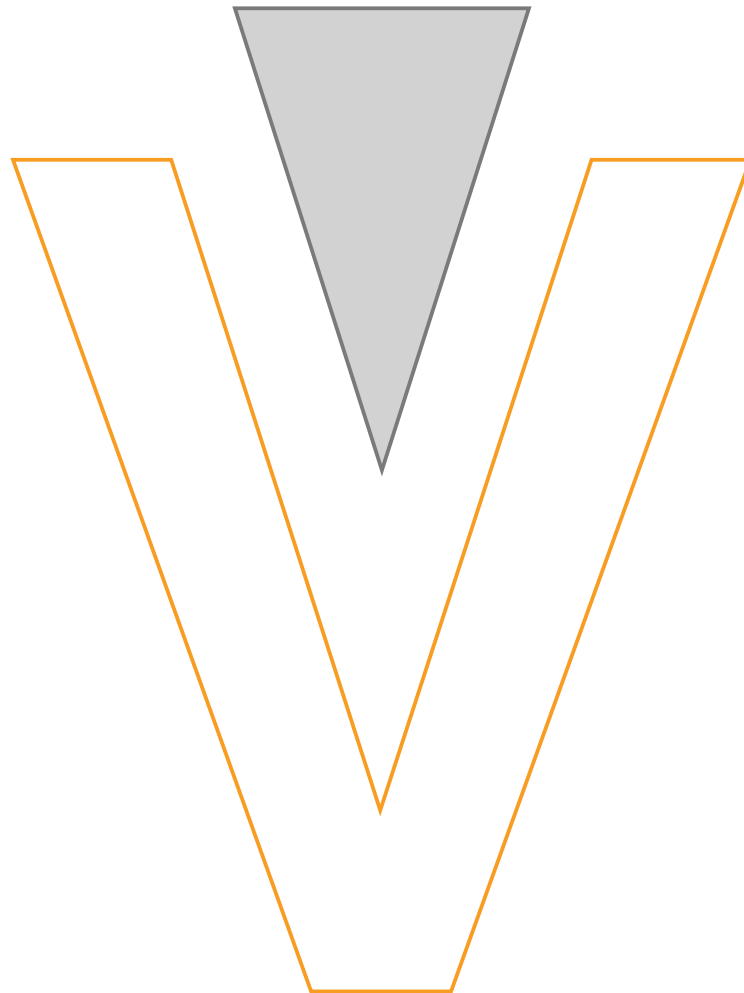

Y-bend, welded

from two bends 90° Type 3D

made of stainless steel

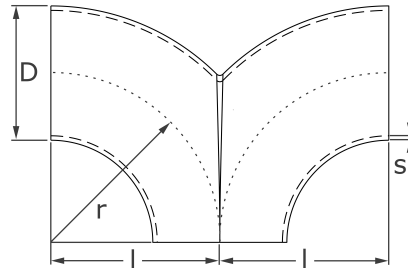

D	s	r	l	kg	Art.-Nr.
26,9	2,0	29,0	29	0,080	YB-026-020
33,7	2,0	38,0	38	0,130	YB-033-020
42,4	2,0	48,0	48	0,200	YB-042-020
48,3	2,0	57,0	57	0,320	YB-048-020
48,3	2,6	57,0	57	0,500	YB-048-026
60,3	2,0	76,0	76	0,520	YB-060-020
60,3	2,6	76,0	76	0,620	YB-060-026
76,1	2,0	95,0	95	84,000	YB-076-020
76,1	2,6	95,0	95	1,060	YB-076-026
88,9	2,0	115,0	115	1,300	YB-088-020
88,9	2,6	115,0	115	1,620	YB-088-026
88,9	2,9	115,0	115	1,900	YB-088-029
114,3	2,0	153,0	153	2,000	YB-114-020
114,3	2,6	153,0	153	2,550	YB-114-026
114,3	2,9	153,0	153	3,620	YB-114-029
139,7	2,0	191,0	191	1,000	YB-139-020
139,7	2,6	191,0	191	4,120	YB-139-026
139,7	3,0	191,0	191	4,600	YB-139-030
168,3	2,0	228,0	228	4,820	YB-168-020
168,3	2,6	228,0	228	5,740	YB-168-026
168,3	3,0	228,0	228	6,620	YB-168-030
219,1	2,0	305,0	305	7,720	YB-219-020
219,1	3,0	305,0	305	11,520	YB-219-030
273,0	3,0	381,0	381	19,000	YB-273-030
323,9	3,0	457,0	457	28,000	YB-323-030
406,4	3,0	610,0	610	47,000	YB-406-030

available material: 1.4307, 1.4571

Y-bend > 90° (Type 3D)



Y-bend

with welding ends

Feature

welded from two bends 90° Type 3D (r=1,5xD)

laser cut

MIG welded

immersion pickled

dimensional range DN 10 - DN 600

wall thickness 2,0 bis 5,0 mm

materials 1.4307/304L - 1.4571 - 1.4404/316L

base material certificate acc. EN 10204/3.1

Varinox GmbH | Revision date 08.10.2025 | Revision number 43 ([t 042])

