



Product Sheet

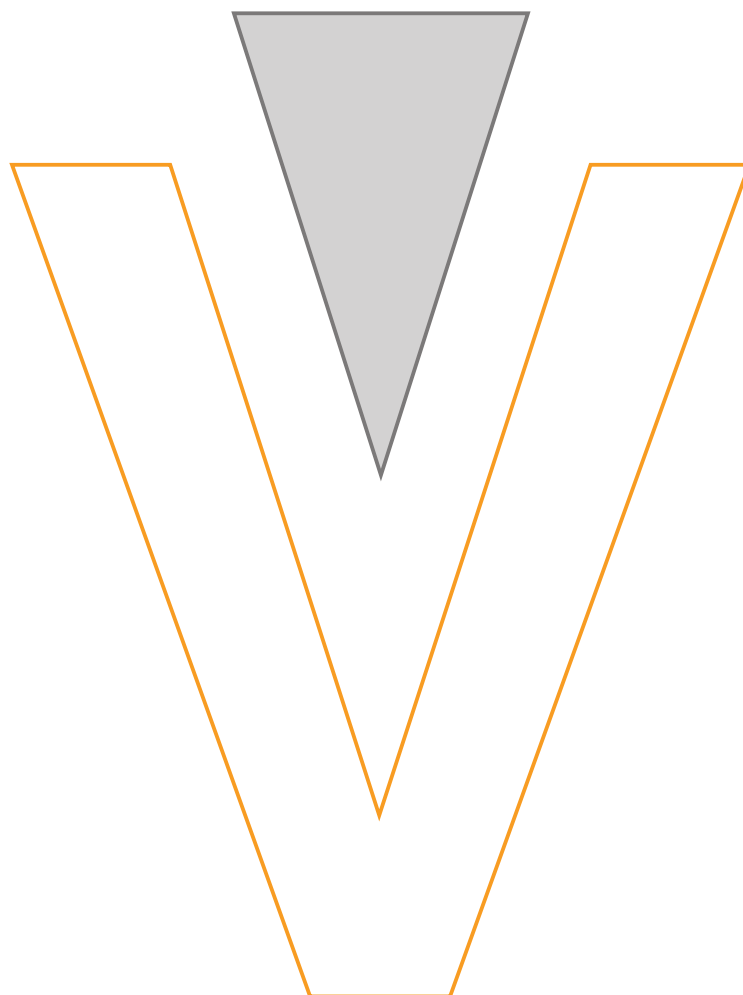

Reducer DIN EN 10253-3

eccentric, welded

made of stainless steel

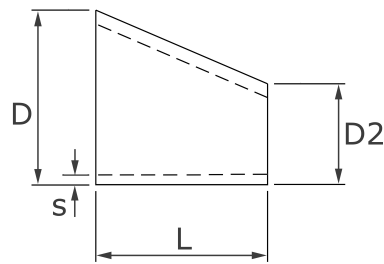

D	D2	s	L	kg	Art.-Nr.
219,1	88,9	2,0	152	1,280	ECCE-219-088X20-4
219,1	88,9	3,0	152	1,900	ECCE-219-088X30-4
219,1	114,3	2,0	152	1,370	ECCE-219-114X20-4
219,1	114,3	3,0	152	2,000	ECCE-219-114X30-4
219,1	139,7	2,0	152	1,340	ECCE-219-139X20-4
219,1	139,7	3,0	152	2,100	ECCE-219-139X30-4
219,1	168,3	2,0	152	1,500	ECCE-219-168X20-4
219,1	168,3	3,0	152	2,230	ECCE-219-168X30-4
273,0	114,3	3,0	178	2,910	ECCE-273-114X30-4
273,0	139,7	3,0	178	2,910	ECCE-273-139X30-4
273,0	168,3	3,0	178	3,100	ECCE-273-168X30-4
273,0	168,3	4,0	178	4,000	ECCE-273-168X40-4
273,0	219,1	3,0	178	3,200	ECCE-273-219X30-4
273,0	219,1	4,0	178	5,000	ECCE-273-219X40-4
323,9	114,3	3,0	203	3,800	ECCE-323-114X30-4
323,9	139,7	3,0	203	3,900	ECCE-323-139X30-4
323,9	139,7	4,0	203	4,700	ECCE-323-139X40-4
323,9	168,3	3,0	203	4,000	ECCE-323-168X30-4
323,9	168,3	4,0	203	5,320	ECCE-323-168X40-4
323,9	219,1	3,0	203	4,100	ECCE-323-219X30-4
323,9	219,1	4,0	203	5,330	ECCE-323-219X40-4
323,9	273,0	3,0	203	4,550	ECCE-323-273X30-4
323,9	273,0	4,0	203	6,500	ECCE-323-273X40-4
355,6	168,3	3,0	330	6,500	ECCE-355-168X30-4
355,6	168,3	4,0	330	8,800	ECCE-355-168X40-4
355,6	219,1	3,0	330	8,000	ECCE-355-219X30-4
355,6	219,1	4,0	330	11,000	ECCE-355-219X40-4
355,6	273,0	3,0	330	7,700	ECCE-355-273X30-4
355,6	273,0	4,0	330	11,000	ECCE-355-273X40-4
355,6	323,9	3,0	330	8,200	ECCE-355-323X30-4
355,6	323,9	4,0	330	11,000	ECCE-355-323X40-4
406,4	219,1	3,0	356	8,600	ECCE-406-219X30-4
406,4	219,1	4,0	356	10,800	ECCE-406-219X40-4
406,4	273,0	3,0	356	9,300	ECCE-406-273X30-4
406,4	273,0	4,0	356	12,000	ECCE-406-273X40-4
406,4	323,9	3,0	356	9,400	ECCE-406-323X30-4
406,4	323,9	4,0	356	15,000	ECCE-406-323X40-4
406,4	355,6	3,0	356	10,110	ECCE-406-355X30-4
406,4	355,6	4,0	356	13,600	ECCE-406-355X40-4
457,2	219,1	3,0	381	11,420	ECCE-457-219X30-4
457,2	323,9	3,0	381	11,700	ECCE-457-323X30-4
457,2	355,6	3,0	381	12,000	ECCE-457-355X30-4
457,2	406,4	3,0	381	12,400	ECCE-457-406X30-4

D	D2	s	L	kg	Art.-Nr.
508,0	219,1	4,0	508	18,700	ECCE-508-219X40-4
508,0	273,0	3,0	508	15,700	ECCE-508-273X30-4
508,0	273,0	4,0	508	25,000	ECCE-508-273X40-4
508,0	323,9	3,0	508	15,800	ECCE-508-323X30-4
508,0	323,9	4,0	508	21,300	ECCE-508-323X40-4
508,0	355,6	3,0	508	16,500	ECCE-508-355X30-4
508,0	355,6	4,0	508	19,000	ECCE-508-355X40-4
508,0	406,4	3,0	508	17,500	ECCE-508-406X30-4
508,0	406,4	4,0	508	23,900	ECCE-508-406X40-4
508,0	457,2	4,0	508	24,600	ECCE-508-457X40-4

available material: 1.4571

Reducers & Caps > eccentric > > DN 150 made of sheet



### Eccentric reducer

gerade

#### Feature

acc. DIN EN 10253-3

Design type A (same wall thickness at the welding end and the fitting body)

without cylindrical ends

sheet metal development, longitudinal seam welded

surface pickled

dimensional range DN 200 -DN 600

wall thickness 2,0 - 5,0 mm

materials 1.4307/304L - 1.4571 - 1.4404/316L

base material certificate acc. EN 10204/3.1

#### Tolerances

##### Tolerance limits for the wall thickness [s]

$\leq 4$  mm - 12,5 % / + 20 %

$> 4$  mm - 12,5 % / + 15 %

##### Tolerance limits for diameter [D]

+/- 1,0 % or +/- 0,5 mm, the greater value applies (EN tolerance class D2)

##### Tolerance limits for overall dimensions [L]

$\leq 219,1$  =  $\pm 2$  mm

$\leq 406,4$  =  $\pm 3$  mm

$\leq 762,0$  =  $\pm 5$  mm

Varinox GmbH | Revision date 08.10.2025 | Revision number 37 ([s 406])

