



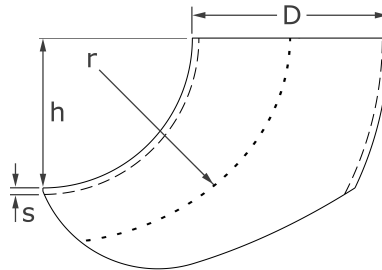

Saddle bend DIN 2619
from a 90° bend Type 3D

short name: SB.*



technical product sheet

D	s	r	h	kg	Art.-Nr.
21,3	2,0	26,0	17	0,045	SB-021-020
26,9	2,0	29,0	16	0,050	SB-026-020
33,7	2,0	38,0	21	0,570	SB-033-020
33,7	2,6	38,0	21	0,090	SB-033-026
42,4	2,0	48,0	60	0,080	SB-042-020
42,4	2,6	48,0	60	0,108	SB-042-026
48,3	2,0	57,0	65	0,110	SB-048-020
48,3	2,6	57,0	65	0,150	SB-048-026
48,3	3,2	57,0	65	0,203	SB-048-032
60,3	2,0	76,0	75	0,239	SB-060-020
60,3	2,6	76,0	75	0,270	SB-060-026
60,3	2,9	76,0	75	0,310	SB-060-029
76,1	2,0	95,0	100	0,344	SB-076-020
76,1	2,6	95,0	100	0,450	SB-076-026
76,1	2,9	95,0	100	0,520	SB-076-029
88,9	2,0	115,0	110	0,521	SB-088-020
88,9	2,6	115,0	110	0,680	SB-088-026
88,9	2,9	115,0	110	0,710	SB-088-029
88,9	3,2	115,0	110	0,763	SB-088-032
114,3	2,0	153,0	135	0,780	SB-114-020
114,3	2,6	153,0	135	0,980	SB-114-026
114,3	2,9	153,0	135	1,246	SB-114-029
114,3	3,6	153,0	135	1,510	SB-114-036
139,7	2,0	191,0	165	1,380	SB-139-020
139,7	2,6	191,0	165	1,570	SB-139-026
139,7	3,0	191,0	165	1,690	SB-139-030
168,3	2,0	228,0	180	1,980	SB-168-020
168,3	2,6	228,0	180	2,290	SB-168-026
168,3	3,0	228,0	180	2,970	SB-168-030
219,1	2,0	305,0	260	3,716	SB-219-020
219,1	2,6	305,0	260	4,436	SB-219-026
219,1	3,0	305,0	260	4,900	SB-219-030
219,1	4,0	305,0	260	6,167	SB-219-040
273,0	3,0	381,0	300	8,300	SB-273-030
323,9	3,0	457,0	360	11,960	SB-323-030
355,6	3,0	534,0	345	15,000	SB-355-030

D	s	r	h	kg	Art.-Nr.
406,4	3,0	610,0	390	16,000	SB-406-030
406,4	4,0	610,0	390	27,000	SB-406-040

available material: ask

Bends > saddle bends > equal, 3D bend



Saddle bend

DIN 2619

Feature

bend Type 3 ($r=1,5xD$)

optional: Type 2 ($r=1xD$) or Type 5 ($r=2,5xD$)

optional: adjusted for a larger pipe diameter

materials 1.4307/304L - 1.4571 - 1.4404/316L

certificate acc. EN 10204/3.1