



## Product Sheet

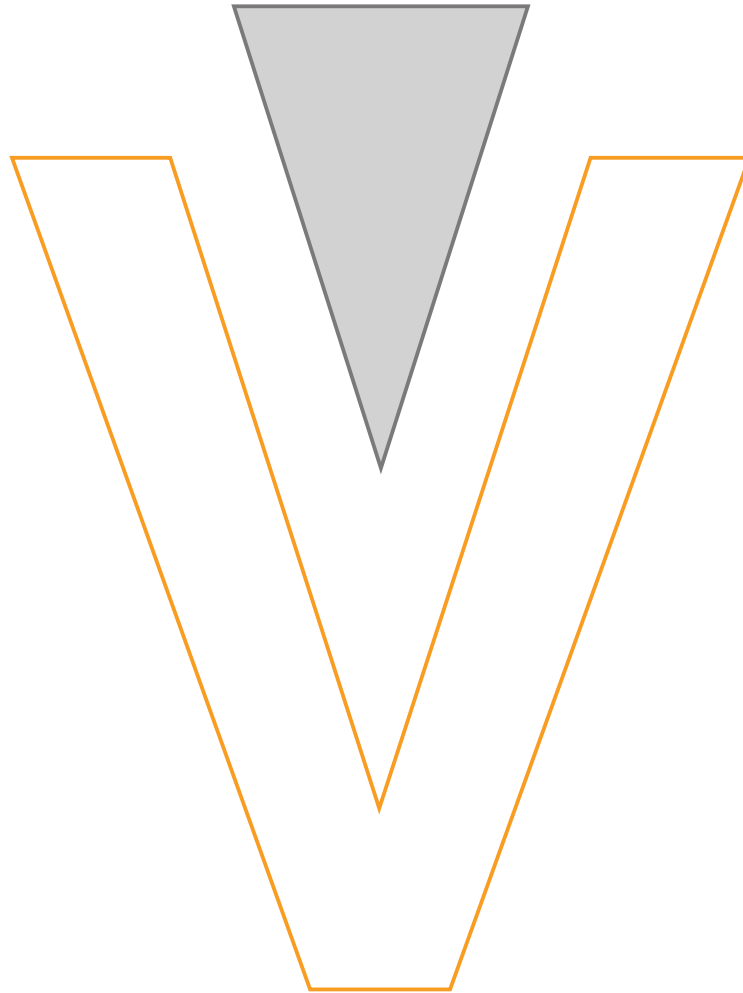

Y-bend  $45^\circ$ , welded

from two bends  $45^\circ$  Type 5D

made of stainless steel



D	s	r	kg	Art.-Nr.
33,7	2,0	73,0	0,170	YB45-033X20-4
42,4	2,0	93,0	0,190	YB45-042X20-4
48,3	2,0	108,0	0,200	YB45-048X20-4
60,3	2,0	135,0	0,410	YB45-060X20-4
76,1	2,0	175,0	0,750	YB45-076X20-4
88,9	2,0	205,0	1,160	YB45-088X20-4
114,3	2,0	270,0	1,880	YB45-114X20-4
114,3	2,6	270,0	2,000	YB45-114X26-4
139,7	2,6	330,0	3,240	YB45-139X26-4
139,7	3,0	330,0	3,720	YB45-139X30-4
168,3	2,6	390,0	4,120	YB45-168X26-4
168,3	3,0	390,0	5,220	YB45-168X30-4
219,1	3,0	510,0	8,520	YB45-219X30-4
273,0	3,0	625,0	13,490	YB45-273X30-4
323,9	3,0	775,0	19,300	YB45-323X30-4

available material: ask

Y-bend > 45° (Type 5D)



## Y-bend

with welding ends

### Feature

welded from two bends 45° Type 5D (r=2,5xD)

laser cut

MIG welded

immersion pickled

dimensional range DN 10 - DN 600

wall thickness 2,0 bis 5,0 mm

materials 1.4307/304L - 1.4571 - 1.4404/316L

inspection certificate basic material acc. EN 10204/3.1