




T-piece 30°

with welded branch

short name: TP30*

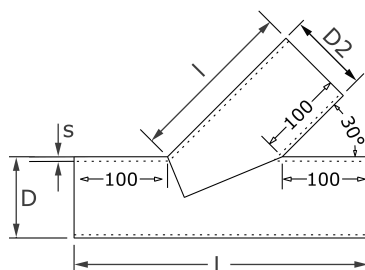


technical product sheet

Ausf	D	s	D2	s2	L	Art.-Nr.
egal	26,9	2,0	26,9	2,0	254	TP30-026-026X20-4
egal	33,7	2,0	33,7	2,0	267	TP30-033-033X20-4
egal	42,4	2,0	42,4	2,0	285	TP30-042-042X20-4
egal	48,3	2,0	48,3	2,0	297	TP30-048-048X20-4
egal	60,3	2,0	60,3	2,0	321	TP30-060-060X20-4
egal	76,1	2,0	76,1	2,0	352	TP30-076-076X20-4
egal	88,9	2,0	88,9	2,0	378	TP30-088-088X20-4
egal	114,3	2,6	60,3	2,0	321	TP30-114-060X26-4
egal	114,3	2,6	114,3	2,6	429	TP30-114-114X26-4
egal	139,7	2,6	139,7	2,6	479	TP30-139-139X26-4
egal	168,3	2,6	168,3	2,6	537	TP30-168-168X26-4
egal	219,1	3,0	219,1	3,0	638	TP30-219-219X30-4
egal	273,0	3,0	273,0	3,0	746	TP30-273-273X30-4
egal	323,9	3,0	323,9	3,0	848	TP30-323-323X30-4
egal	355,6	3,0	355,6	3,0	911	TP30-355-355X30-4
egal	406,4	3,0	406,4	3,0	1013	TP30-406-406X30-4
red.	33,7	2,0	21,3	2,0	243	TP30-033-021X20-4
red.	33,7	2,0	26,9	2,0	354	TP30-033-026X20-4
red.	42,4	2,0	21,3	2,0	243	TP30-042-021X20-4
red.	42,4	2,0	26,9	2,0	254	TP30-042-026X20-4
red.	42,4	2,0	33,7	2,0	267	TP30-042-033X20-4
red.	48,3	2,0	26,9	2,0	254	TP30-048-026X20-4
red.	48,3	2,0	33,7	2,0	267	TP30-048-033X20-4
red.	48,3	2,0	42,4	2,0	285	TP30-048-042X20-4
red.	60,3	2,0	33,7	2,0	267	TP30-060-033X20-4
red.	60,3	2,0	42,4	2,0	285	TP30-060-042X20-4
red.	60,3	2,0	48,3	2,0	297	TP30-060-048X20-4
red.	76,1	2,0	42,4	2,0	285	TP30-076-042X20-4
red.	76,1	2,0	48,3	2,0	297	TP30-076-048X20-4
red.	76,1	2,0	60,3	2,0	321	TP30-076-060X20-4
red.	88,9	2,0	48,3	2,0	297	TP30-088-048X20-4
red.	88,9	2,0	60,3	2,0	321	TP30-088-060X20-4
red.	88,9	2,0	76,1	2,0	352	TP30-088-076X20-4
red.	114,3	2,6	76,1	2,0	352	TP30-114-076X26-4
red.	114,3	2,6	88,9	2,0	378	TP30-114-088X26-4
red.	139,7	2,0	76,1	2,0	352	TP30-139-076X26-4

Ausf	D	s	D2	s2	L	Art.-Nr.
red.	139,7	2,0	88,9	2,0	378	TP30-139-088X26-4
red.	139,7	2,6	114,3	2,6	429	TP30-139-114X26-4
red.	168,3	2,6	88,9	2,0	378	TP30-168-088X26-4
red.	168,3	2,6	114,3	2,6	429	TP30-168-114X26-4
red.	168,3	2,6	139,7	2,6	479	TP30-168-139X26-4
red.	219,1	3,0	114,3	2,6	429	TP30-219-114X30-4
red.	219,1	3,0	139,7	2,6	479	TP30-219-139X30-4
red.	219,1	3,0	168,3	2,6	537	TP30-219-168X30-4
red.	273,0	3,0	139,7	2,6	478	TP30-273-139X30-4
red.	273,0	3,0	168,3	2,6	537	TP30-273-168X30-4
red.	273,0	3,0	219,1	3,0	638	TP30-273-219X30-4
red.	323,9	3,0	168,3	2,6	537	TP30-323-168X30-4
red.	323,9	3,0	219,1	3,0	638	TP30-323-219X30-4
red.	323,9	3,0	273,0	3,0	746	TP30-323-273X30-4
red.	355,6	3,0	219,1	3,0	638	TP30-355-219X30-4
red.	355,6	3,0	273,0	3,0	746	TP30-355-273X30-4
red.	355,6	3,0	323,9	3,0	848	TP30-355-323X30-4
red.	406,4	3,0	273,0	3,0	746	TP30-406-273X30-4
red.	406,4	3,0	323,9	3,0	848	TP30-406-323X30-4
red.	406,4	3,0	355,6	3,0	911	TP30-406-355X30-4

available material: ask

45° / 30° branches > T-piece 30°

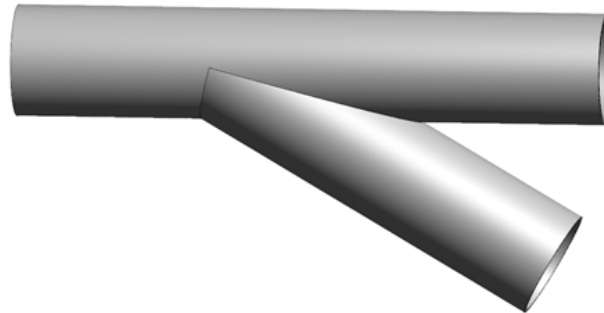

T-piece 30°

with welded branch

Feature

- manufactured from welded pipe or sheet metal
- laser cut
- with butt-welded branch nozzle
- MIG welded
- immersion pickled
- dimensional range DN 10 bis DN 600
- optional with 45° or 60° branch
- optional wall thicknesses up to 5,0 mm
- optional with redeuced branch
- materials 1.4307/304L - 1.4571 - 1.4404/316L
- base material certificate acc. EN 10204/3.1

Varinox GmbH | Revision date 08.10.2025 | Revision number 32 ([s 168])

